



NOTE ON CLADDING MATERIAL MAINTENANCE:

The Alucobond Natural Reflect 405 cladding panel has a stove—lacquered surface, from which normal dirt and deposits are washed away by rainwater. Occasional cleaning is recommended by the manufacturer, depending on local environment conditions, and should be either manual using a soft brush or by means of a high-pressure cleaner with clean water. Cleaning will be programmed to coincide with scheduled maintenance of the CHP. Access to the panels would be from a self-propelled telescopic high reaching boom (cherry-picker).

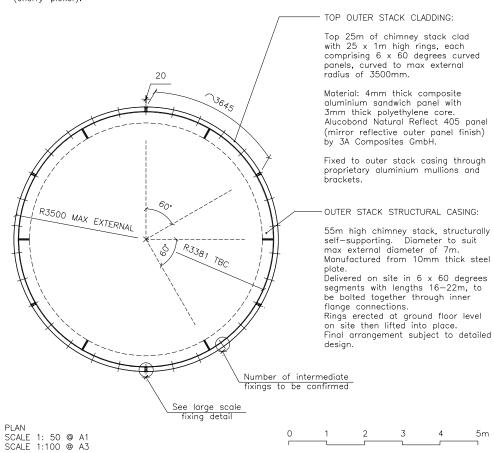


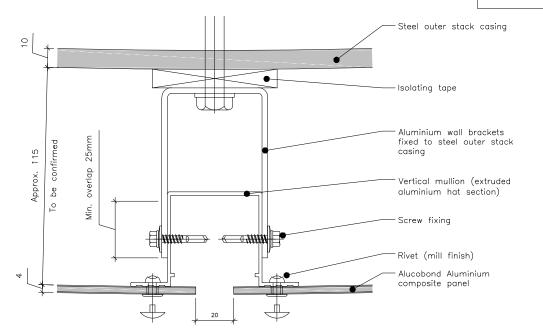

TYPICAL FIXING DETAIL SCALE 1:1 @ A1 SCALE 1:2 @ A3

0 10 20 30 40 50

100mm

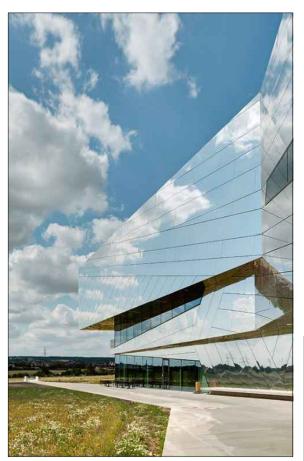



PHOTOGRAPHS SHOWING THE ALUCOBOND CLADDING PANELS AT THE SCHONINGER SPEARS BUILDING (GERMANY) (Paläon, Śchöninger Speere)

ARCTICA

Telephone 01780 482200 Fax 01780 480716

For planning purposes only Anyone scaling from this drawing is responsible to make sure that the graphic scale is accurate at a recognisable scale This drawing is copyright

PROJECT

RIVENHALL IWMF

DRAWING

CHIMNEY STACK TOP CLADDING DETAILS FIXING DETAILS

R EV

ALSCALE AS SCALE | JOB AS NOTED 15-31 NUMBER

LA02